

WL8200-X4

Indoor 802.11ax Wi-Fi 6 Dual Band Enterprise AP

Product Overview

WL8200-X4 is a dual-band high-performance gigabit wireless access point device based on the 802.11ax standard launched by DCN, it could offer maximum 2975Mbps access rate. WL8200-X4 works in the 2.4GHz and 5GHz frequency bands and supports advanced wireless technologies such as MU-MIMO, OFDMA, spatial multiplexing, and TWT. The first radio of WL8200-X4 works in the 2.4GHz frequency band and can provide a maximum access rate of 575Mbps; the second radio works in the 5GHz frequency band and can provide a maximum access rate of up to 2400Mbps.



802.11a/b/g/n/ac /ax



2975Mbps, 4*4 MIMO



concurrent user 300+



anti-theft



standard PoE input



cloud management

Key Features and Highlights

Entry-level enterprise-class indoor 802.11ax Wi-Fi 6 wireless access point

WL8200-X4 supports the 802.11ax standard, operates in both 2.4 GHz and 5 GHz band, and provides an access bandwidth up to 2975 Mbps. This model is the best choice for middle-level office or company as it can support concurrent users up to 300+.

Wireless user management at a fine granularity

WL8200-X4 can support a maximum of 32 WLANs to implement multi-layer multi-service management of wireless users at a fine granularity. Each WLAN supports access control and uplink/downlink rate limit based on MAC or IP addresses. These WLANs may be bound to virtual local area networks (VLANs).

Flexible installation

WL8200-X4 supports wall mounting, ceiling mounting, T-keel mounting, you can deploy it almost everywhere

that you want.

Anti-thief

WL8200-X4 can work with Kensington technology to protect the investment of customers, which is very important to the specific customer.

Good PoE compatibility

WL8200-X4 can work well with all PoE switch (cisco, HUAWEI, juniper, etc.) which support 802.3af & at standard, this allows to power up WL8200-X4 directly, a power adapter is not required anymore.

Multi-mode: fit, fat, bridge

WL8200-X2 R2 can work in fit, fat or bridge mode and can flexibly switch between these three modes according to network planning requirements.

Product Specifications

Hardware Specifications

Item	WL8200-X4
Dimensions (L*W*D) (mm)	201 x 195 x 41
Physical port t	2 x 10/100/1000/2500Mbps ethernet ports 1 x BLE module
Console port (RJ-45)	1
USB 2.0	2
Power supply	802.3at and External power adapter (Input: 100 ~ 240V AC , Output: 12 V DC)
Maximum power consumption	<20W
RF port	Built-in 2.4 GHz 4 dBi antenna and 5 GHz 5 dBi antenna
Working frequency band	802.11b/g/n/ax: 2.4GHz-2.483GHz 802.11a/n/ac/ac wave 2/ax : 5.725~5.850GHz ; 5.150~5.350GHz ; 5.47~5.725GHz
Modulation technology	11b : DSS: CCK@5.5/11Mbps, DQPSK@2Mbps, DBPSK@1Mbps 11a/g : OFDM:64QAM@48/54Mbps,16QAM@24Mbps, QPSK@12/18Mbps, BPSK@6/9Mbps 11n : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM 11ac : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM,256QAM 11ax: MIMO-OFDMA: BPSK, QPSK,16QAM,64QAM,256QAM,1024QAM
Transmit power	2.4GHz: 23dBm (Per Chain) 5GHz: 23dBm (Per Chain) (Note: final output power comply with deployment regulation might be different)
Power adjustment granularity	1 dBm
Working/Storage	-10°C to +55°C

temperature	-40°C to +70°C
Working/Storage RH	5% to 95% (non-condensing)
Protection level	IP41

Software Specifications

Item	Feature	WL8200-X4
WLAN	Product positioning	Indoor dual-frequency
	Working frequency band	2.4 GHz and 5 GHz
	Bandwidth performance	2975Mbps
	Virtual AP (BSSID)	32
	Concurrent user	300+
	Number of spatial streams	2.4GHz:2, 5GHz:4
	Dynamic channel adjustment (DCA)	Yes
	Transmit power control (TPC)	Yes
	Blind area detection and repair	Yes
	SSID hiding	Yes
	RTS/CTS	Yes
	RF environment scanning	Yes
	Hybrid access	Yes
	Restriction on the number of access users	Yes
	Link integrity check	Yes
	Accessing control of terminals based on signal strength	Yes
	Forcing terminals to roam based on signal strength	Yes
Intelligent control of terminals based on airtime fairness	Yes	
High-density application optimization	Yes	
802.11ax	Space streams	2.4GHz:2, 5GHz:4
	Frequency band	2.4GHz +5GHz
	80 MHz bundling	Yes
	Frame aggregation (A-MPDU)	Yes
	Frame aggregation (A-MSDU)	Yes
	Maximum likelihood demodulation (MLD)	Yes
	Transmit beamforming (TxBF)	Yes
	Maximum ratio combining (MRC)	Yes
	Space-time block coding (STBC)	Yes
	Low-density parity-check code (LDPC)	Yes
Security	Encryption	64/128 WEP, TKIP, and CCMP encryption
	802.11i	Yes
	Portal authentication	Yes
	WAPI	Yes
	MAC address authentication	Yes
	LDAP authentication	Yes
	PEAP authentication	Yes
WIDS/WIPS	Yes	

Item	Feature	WL8200-X4
	Protection against DoS attacks	Anti-DoS for wireless management packets
	Forwarding security	Frame filtering, white list, static blacklist, and dynamic blacklist
	User isolation	AP L2 forwarding suppression Isolation between client
	Periodic SSID enabling and disabling	Yes
	Access control of free resources	Yes
	Wireless SAVI	Yes
	ACL	Access control of various data packets such as MAC, IPv4, and IPv6 packets
	Secure access control of APs	Secure access control of APs, such as MAC authentication, password authentication, or digital certificate authentication between an AP and an AC
	802.11W	Yes, encryption of management frames
Forwarding	IP address setting	Static IP address configuration or dynamic DHCP address allocation
	IPv6 forwarding	Yes
	IPv6 portal	Yes
	Local forwarding	Yes
	Multicast	IGMP snooping
	Roaming	Yes
	AP switching reference	Signal strength, bit error rate, RSSI, S/N, whether neighboring APs are normally operating, etc.
	WDS	Yes
QoS	WMM	Yes
	Priority mapping	Ethernet port 802.1P identification and marking Mapping from wireless priorities to wired priorities
	QoS policy mapping	Mapping of different SSIDs/VLANs to different QoS policies Mapping of data streams that match with different packet fields to different QoS policies
	L2-L4 packet filtering and flow classification	Yes: MAC, IPv4, and IPv6 packets
	Load balancing	Load balancing based on the number of users Load balancing based on user traffic Load balancing based on frequency bands
	Bandwidth limit	Bandwidth limit based on APs Bandwidth limit based on SSIDs Bandwidth limit based on terminals Bandwidth limit based on specific data streams
	Call admission control (CAC)	CAC based on the number of users
	Power saving mode	Yes
	Automatic emergency mechanism of APs	Yes
	Intelligent identification of terminals	Yes
	Multicast enhancement	Multicast to unicast
	BYOD	Identification of terminals
Management	Network management	Centralized management through an AC; both fit and fat modes
	Mesh networking	Through central AP to manage the RE AP
	Maintenance mode	Both local and remote maintenance
	Log function	Local logs, Syslog, and log file export


Item	Feature	WL8200-X4
	Alarm	Yes
	Fault detection	Yes
	Statistics	Yes
	Switching between the fat, fit and bridge modes	An AP working in fit mode can switch to the fat mode through a wireless AC; An AP working in fat mode can switch to the fit or bridge mode through a local control port or Telnet(web) An AP working in bridge mode can switch to the fit or fat mode through a local control port or Telnet(web)
	Remote probe analysis	Yes
	Watchdog	Yes
Value added service	Value added marketing	Support: various apps based on intelligent terminals, advertising push based on location, personalized push of portals
	Value added authentication	WeChat, SMS, QR code
	Passenger flow analysis	yes

Typical Application

WL8200-X4 is ideal AP for indoor Wi-Fi coverage, with zero touch provisioning, advanced RF control and cost-effective design, it could offer best indoor Wi-Fi experience for customers.




Class room

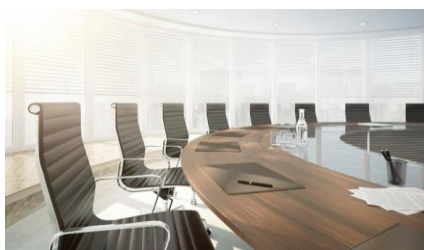

Medium-sized Meeting room



Office

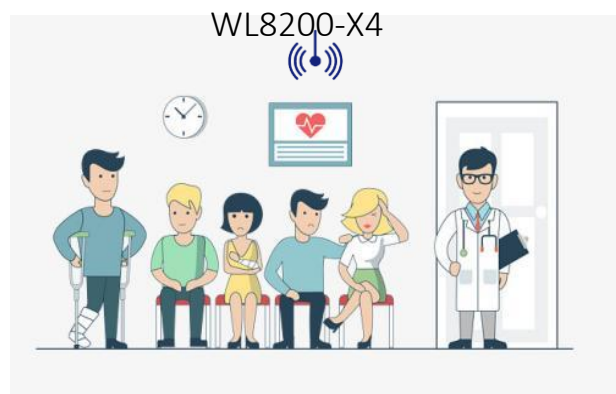

Hospital

- 802.11ax, Wi-Fi 6
- Access bandwidth 2975Mbps
- 802.3at PoE
- Anti-thief
- Concurrent user 300+

Order Information

Product	Description
WL8200-X4	DCN Indoor Wi-Fi 6 AP, 802.11a/b/g/n/ac/ax supported (2.4GHz:2*2, 5GHz:4*4), max 2975Mbps access rate, fat/fit/bridge, 802.3at PoE, default no power adapter, managed by DCN hardware controller & cloud platform